


LD-01Pro

Automatic Card Dispenser

系列电动发卡机

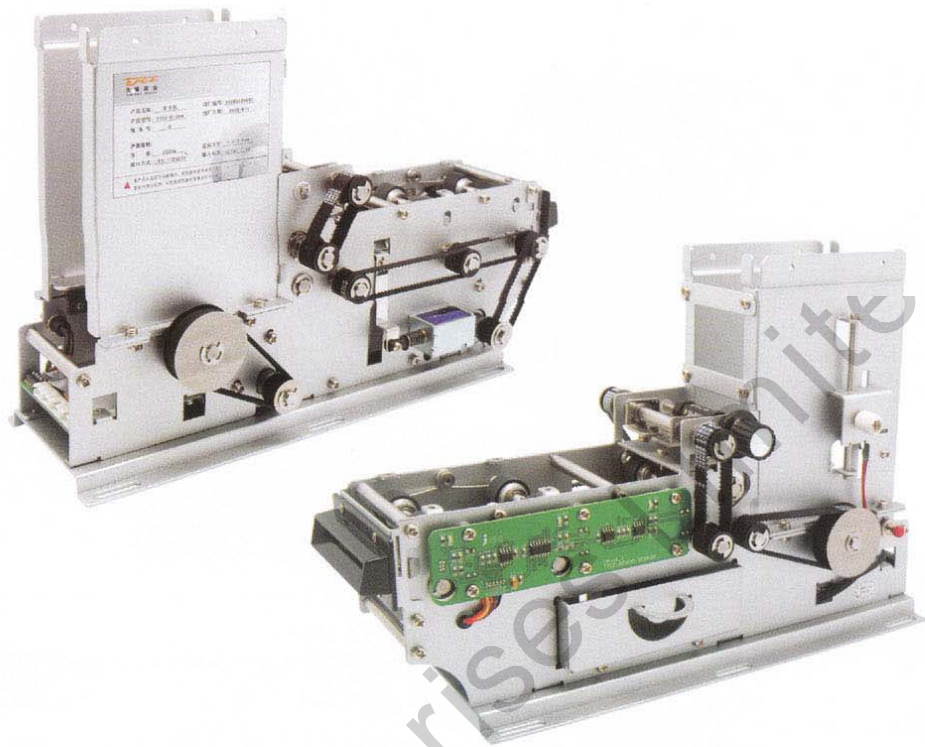

特征 Characters

- 工业级设计，表面烤漆处理，良好的耐磨耐腐蚀性，适应各种高、低温，多灰尘等恶劣环境
Industry design, surface finished with corrosive and abrasive resistant paint. Suitable to all kinds of bad environment, such as high, low temperature and dusty environment.
- 拟人型摩擦式发卡，对各类变形卡有较好的适应性
Personified friction card issuing makes machine better fit for various distorted cards.
- 专利技术(专利号：200620148190.2)——六档位卡距调节功能，CNC的精度保证卡距的绝对一致性。简单、标准
Patented technology (Patent No. : 200620148190.2) —— Six optional card space adjustment, CNC precision ensures card unanimity of card space.
- 预留了活动式票箱安装位，更有效的对卡片进行管理
Reserve active stacker install space makes effective card management available.
- 防尘、防异物卡口设计，提高卡机的使用寿命
Card slot designed to prevent dust and foreign things from falling into it, allow longer life span of card machine.
- 可叠加的卡箱设计，使卡箱容量灵活可变
Extended stacker design makes card stacker capacity flexible.
- 支持错误卡的回收 Support error card capture function

应用 Application

- 停车场管理系统 Parking lot management system
- 自动贩卖系统 Automatic vending system
- 公园售票系统 Park ticket vending system
- 卡片发行系统 Card issuing system

LD-01Pro

Automatic Card Dispenser

系列电动发卡机

技术参数 Specification

工作电源 (Power Supply)	DC24V (最大电流2A,静态电流0.1A) DC24V (Max, Current 2A, Static State Current0.1A)
工作温度 (Operation Temperature)	-20℃ to 85℃
工作湿度 (Operation Humidity)	0-90%RH
接口方式 (Communication)	TTL/RS232
持卡位置 (Card Feeding-out Position)	多卡位控制 (Multiple Card Position Setting)
使用条件 (Operation Conditions)	安装在箱柜中使用 (In the operation Cabinet)
适用卡片 (Card Size)	卡宽 (Card width) :54 ± 0.5mm 卡长 (Card length):85 ± 0.5mm
卡片厚度 (Card Thickness)	0.2-2.0mm可调0.2-2.0mm (Easy Adjustable)
适用卡片材料 (Card Material)	各类纸质卡片或聚酯类卡片 (Paper or polyester Card)
发卡机净重 (Weight)	2.5KG(含压块) Approximately 2.5kg(Include Card Holder)
卡箱容量 (Capacity)	按卡厚0.76mm计算,标准型155张 Standard card 600 pcs (0.76 mm thickness card)

